MXN-P7DQ

Capriel Nederland - Kringdans 72 - 2907RM Capelle aan den IJssel - Nederland
Tel: +31104582431 - Fax: +31104583989 - Mobiel: +31629044715
E-mail: info@capriel.eu - Websites: www.capriel.nl - www.mxn.eu

7” Digital LCD Quad Monitor

Capriël Nederland

FEATURES

- High Resolution **7" Digital** TFT LCD
- **Auto-Heating** Control System (below 0˚C)
- **Shutter camera support** & **camera heater support**
- Water Resistant **(IP67)**
- **4 Camera Inputs & 1 AV Input**
- Automatic Brightness Control
- Auto Scan function
- Auto Power ON/OFF
- NTSC/PAL Compatible
- Multi-lingual OSD control
- Tamperproof function
- Built-in Speaker
- Electronic Distance Marker (Parking line & Horizontal line)
- Free Input voltage (DC 10V ~ 30V)
- Bracket rails and **Heavy Duty mounting possibility**
- Speedswitch function via tacho signal
  (in case of frontview purpose)
- Sunvisor – included
- **All connections via one multi-cable**
  (no external controlbox)

< SPLIT MODE >

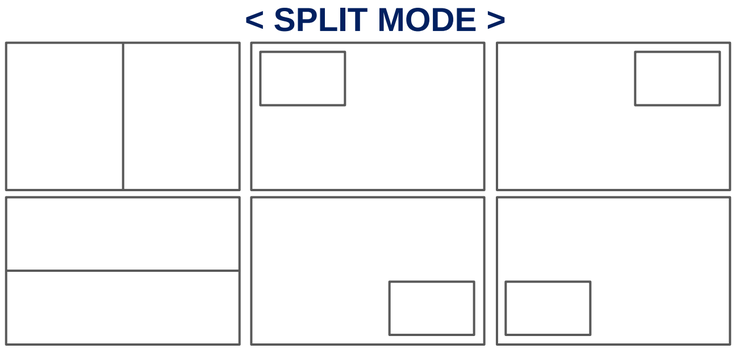

< TRIPLE MODE >

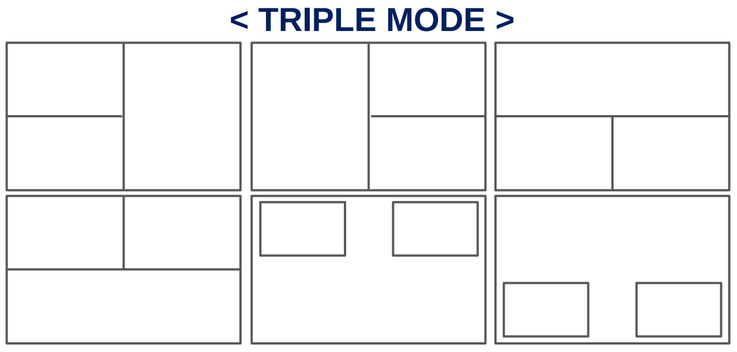

< QUAD MODE >

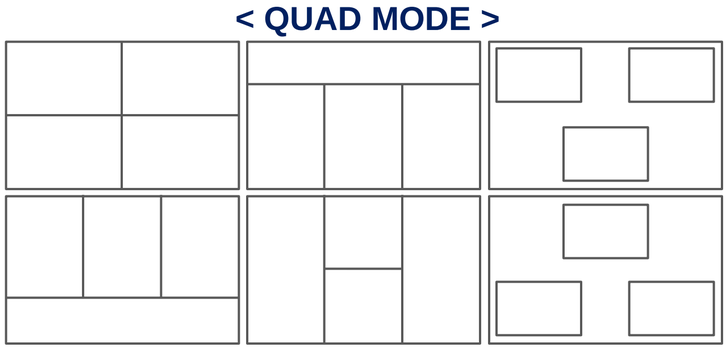

Specifications

Power input	**10V~30V DC**
Power Consumption	**15 Watt Max.**
Video System	**NTSC, PAL signal Compatible**
Panel	**7” Digital**
Resolution	**800 RGB(H) X 480(V)**
Format	**16:9 wide**
Brightness	**400cd/m2**
Display Mode	**Single / Split / Triple / Quad / PIP**
Camera Input (4CH)	**Mini DIN 4P, 1Vp-p 75Ω**
A/V Input	**RCA Audio / Video**
Operating Temperature	**-25˚C ~ 75˚C**
Storage Temperature	**-30˚C ~ 85˚C**
Dimensions	**193(W) X 132(H) X 50.5(D) mm**
Weight	**Approx. 620g (740g with sunvisor)**
O.S.D. control	**Day & Night Sensor** **Bright, Contrast, Color, Tint** **Mirror/Normal image switch, Up/Down image switch** **Pre-Heating, Trigger activation, Speed switch,** **Auto-Scan, Auto-Power, Multi-lingual OSD** **Factory Reset**